



## Operating Manual

**A 4370A** 125 Watt Power Amplifier

**A 4380A** 250 Watt Power Amplifier

### OVERVIEW

These Redback 125W and 250W power amplifiers are ideal for installations requiring high power zone amplifiers. Ideally suited for use in shopping centres, pedestrian precincts, public transport facilities and convention centres.

### FEATURES

- Robust design incorporating latest Mosfet technology
- Very Low noise and distortion
- 70V, 100V and 4-16Ω outputs
- 240V AC or 24V DC operation
- 24V DC @ 1 Amp output for external devices
- Multi stage thermally cued fan cooling
- Output Peak Limited
- Thermal Overload protected
- Signal Presence Indicators
- Fault Indicators
- Power Status Indicators
- Rack Mountable (suits 19 inch racks)

### POWER SUPPLY

The amplifier operates on 230V AC or 24V DC primarily for battery backup operation. Ensure power is switched OFF at the front panel before connecting either mains power to the IEC socket or 24V DC to the screw terminal input. (see Fig 2 for more details) As high currents may be drawn when operating from a 24V DC supply confirm the capacity of the DC power supply used.

### AUDIO CONNECTIONS

Audio input is via a 3 pin XLR socket on the rear of the amplifier. This is a 1V line level balanced signal which is normally fed from a mixer panel. Pinout details are printed on the rear of the amplifier. A balanced Line Out XLR socket is also provided on the rear of the amplifier for passing the audio signal on to more slave amplifiers if required. The amplifier output level control is also rear mounted to prevent tampering or accidental adjustment (see Fig 2 for more details).

# Redback® 125/250Watt Power Amplifiers

## SPEAKER CONNECTIONS

Speakers with a total impedance or 4-16Ω may be connected to the terminals marked 4-16Ω on the rear of the amplifier. Speakers fitted with line transformers (either 70V or 100V) may be connected to the corresponding terminals on the rear of the amplifier. Always ensure the total load of the fitted speakers does not exceed the rated output of the amplifier otherwise damage may result. When fitting speakers with line transformers the impedance of the load cannot be measured using a standard multimeter. An impedance meter is required. Fig 1 lists the impedance at certain loads of speakers fitted with 70V and 100V line transformers. So for a total load of 250 watts using 100V line transformer fitted speakers the impedance of the speaker load should be 40Ω.

## 24V DC OUTPUT

A constant 24V output terminal has been provided to power ancillary 24V devices (see Fig 2 for more details). The output has a maximum current draw of 1 amp. If more than 1 amp is drawn from the output, internal polyswitches will disconnect the output. These will reset once the current draw is reduced.



### About 70V & 100V Line Speaker Systems

**Wiring speakers in parallel for 70/100V line:** Where several speakers are to be used at one time, on one circuit, it becomes necessary to use speakers fitted with line-matching transformers. This is to overcome the effects of connecting speakers in parallel and cable losses. The amplifier generally has an output voltage of 100 volts (70 volts is typically used in North America, however operation is similar). In this configuration the total wattage load on the amplifier is derived from adding all the line transformer primary tap ratings together. For example, 70 one watt speakers will have a total speaker load of 70 watts. Or alternatively, it is conceivable to connect 100 one watt speakers to a 100 watt, 100 volt line amplifier.

**Measuring 70/100V Line Speaker Impedance:** To measure amplifier system load, you must use an impedance meter in order to measure the ac resistance of the connected speaker network. Impedance cannot be measured with a standard multimeter, as this measures the dc resistance. Use the Altronics Q 2004 or similar impedance meter.

Load	70V	100V
0.5W	9.4kΩ	20kΩ
0.66W	7.12kΩ	15kΩ
1W	4.7kΩ	10kΩ
1.25W	3.76kΩ	8kΩ
2W	2.35kΩ	5kΩ
2.5W	1.88kΩ	4kΩ
3W	1.56kΩ	3.3kΩ
5W	940Ω	2kΩ
7.5W	626Ω	1.3kΩ
10W	470Ω	1kΩ
15W	313Ω	666Ω
20W	235Ω	500Ω
30W	156Ω	333Ω
40W	117Ω	250Ω
60W	78Ω	166Ω
100W	47Ω	100Ω
125W	37Ω	80Ω
250W	19Ω	40Ω
500W	9.4Ω	20Ω

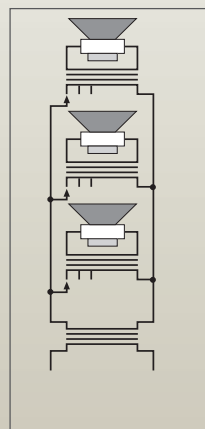


Fig 1

## TROUBLE SHOOTING

If the REDBACK Phase 4 amplifier fails to deliver the rated performance, check the following:

### No Power, No Lights

Make sure amplifier power switch is on. Make sure mains power switch is on at the wall. Check the mains and DC fuse. Replace with only the correct type and rating. Over rated fuses will invalidate warranty.

### Distorted Output

Check that the speaker type is correct for the output that you are using (ie. 4-16Ω, 70V or 100V line). Check for any short circuits on the speaker line.

### Very Low Output Volume

Make sure that the input is the correct level (check for shorted connectors). Check for any short circuits on the speaker line.

Check if signal LED on the front panel is lit to indicate there is signal. If it is not lit there is no signal present.

### Continually Blows Fuses

Make sure that the speaker line is not shorted. Check speaker types, ratings and if on correct output.

### Amplifier Keeps on Cutting In & Out

Make sure that there is adequate ventilation around the amplifier. Check the vent slots on the front, top and sides are not covered or blocked and the fan on the rear is functioning correctly. Check also speaker types, ratings and for any short circuits on the speaker line.


### No Output From 24V DC

Make sure the the 24V DC Out connector is wired correctly.

# Redback® 125/250Watt Power Amplifiers


Fig 2 shows a typical install where the A 4370A amplifiers are used as slave amplifiers with the audio output from the mixer amplifier passed through each slave amplifier.

## MIXER AMPLIFIER

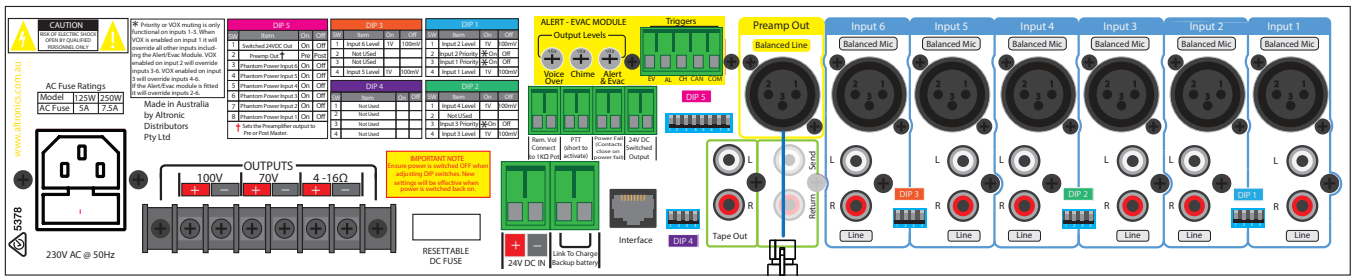


Speakers fitted with 100V line transformers.

## A 4370A AMPLIFIER

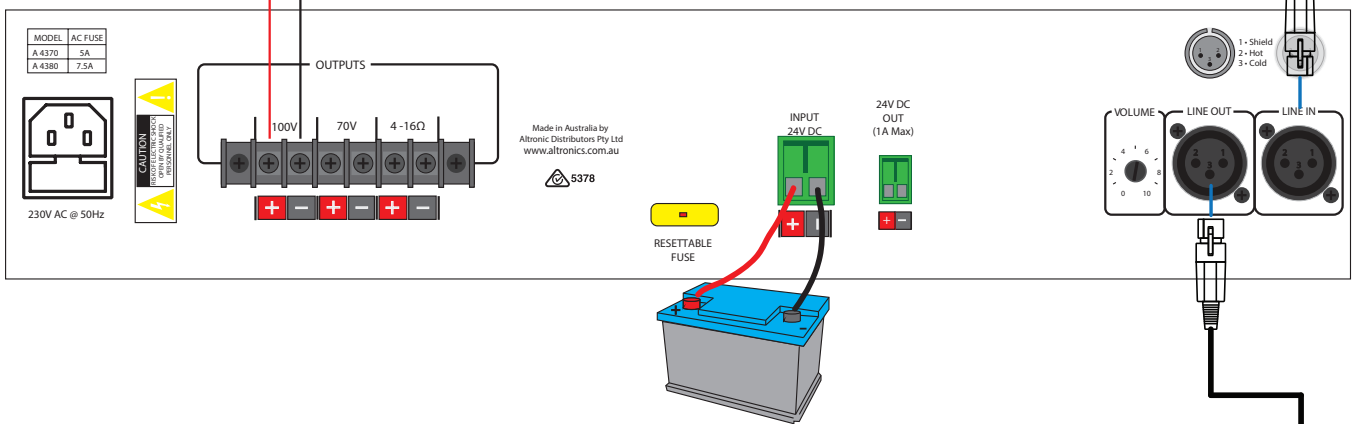

## SLAVE AMPLIFIER

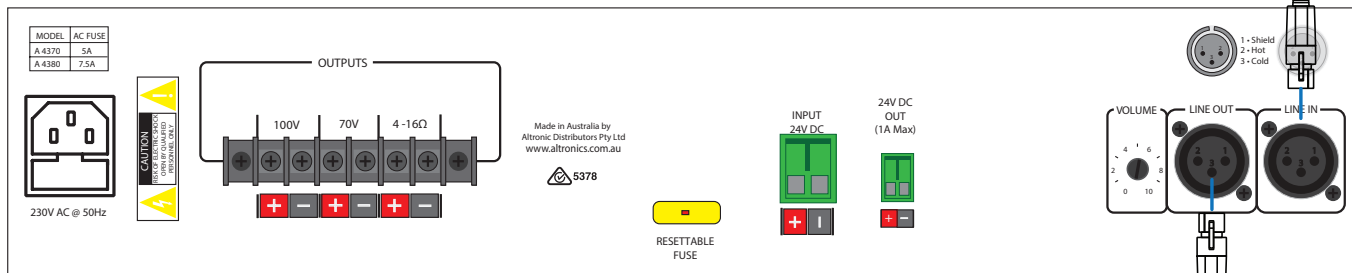

## SLAVE AMPLIFIER

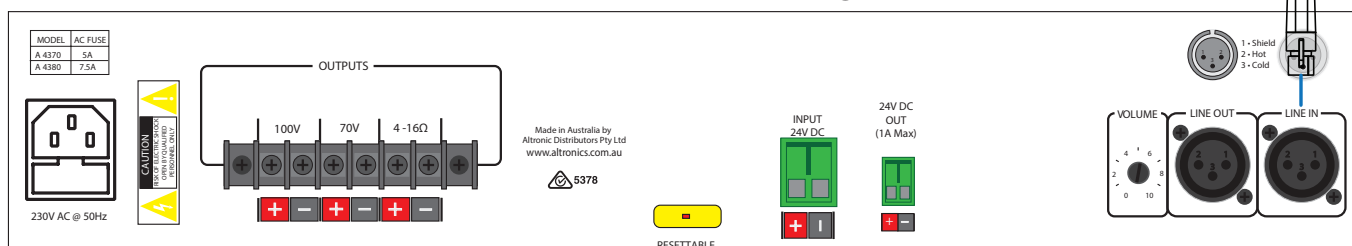


Fig 2

# Redback® 125/250Watt Power Amplifiers

SPECIFICATIONS Measurements referenced to 1kHz.

Power output:	A 4370A - 125 W RMS, A 4380A - 250W
Distortion:	< 0.5%, @ 1kHz
Frequency response	50Hz - 15kHz, -3dB
Output line:	100V, 70V, or 4 - 16Ω
Signal to noise ratio	(peak limiting by-passed) > 90 dB
Line output:	600Ω balanced, 0dBV, 3 pin XLR
Speaker connection	Screw terminals
24V DC output:	Screw terminals
Inputs:	3 pin XLR (1V)
24V-30V dc power:	Screw terminals
240V ac power:	IEC power connector
Indicators:	Mains, 24V DC, Power, Signal presence, Over temp, Over current, Shut down, Peak limiting
Current Draw:	A 4370A - 250mA Standby, 8A Full @ 24V dc
Current Draw:	A 4380A - 250mA Standby, 17A Full @ 24V dc
Power supply:	240V ac or 24V dc (nominal)
Protection:	A 4370A - 5A ac and 10A dc fuse A 4380A - 7.5A ac and 20A dc fuse
Dimensions:	≈ 483W x 340D x 88H
Input Impedance:	≈ 10KΩ

**REDBACK** is a registered trademark of Altronic Distributors Pty Ltd

You may be surprised to learn that Altronics is still manufacturing hundreds of product lines right here in Australia. We have resisted the move offshore by offering our customers better quality products with innovations to save them time and money.

Our Balcatta production facility manufactures/assembles:  
Redback public address products  
One-shot speaker & grill combinations  
Zip-Rack 19 inch rack frame products

We strive to support local suppliers wherever possible in our supply chain, helping to support Australia's manufacturing industry.

## Redback Audio Products

100% developed, designed & assembled in Australia.

Since 1976 we have been manufacturing Redback amplifiers in Perth, Western Australia. With over 40 years experience in the commercial audio industry, we offer consultants, installers and end users reliable products of high build quality with local product support. We believe there is significant added value for customers when purchasing an Australian made Redback amplifier or PA product.

## Local support & feedback.

Our best product features come as a direct result of feedback from our customers, and when you call us, you speak to a real person - no recorded messages, call centres or automated push button options.

It's not only the assembly team at Altronics who are employed as a direct result of your purchase, but hundreds more at local companies used in the supply chain.

## Industry leading 10 year warranty.

There's a reason we have the industry leading DECADE warranty. It's because of a long tried and tested history of bullet-proof reliability. We've heard PA contractors tell us they still see the original Redford amplifier still in service in schools.

We offer this comprehensive parts & labour warranty on almost every Australian Made Redback public address product. This offers both installers and end users peace of mind that they will receive prompt local servicing in the rare event of any problems.

Distributed by Altronic Distributors Pty. Ltd.

Phone: 1300 780 999 Fax: 1300 790 999 Internet: [www.altronics.com.au](http://www.altronics.com.au)